

### GENERAL FEATURES

- **Long Service Life** - Thick plate design and efficient gas recombination yield a service life expectancy of up to 10 years in standby mode.
- **Low Internal Resistance** - Superb high-rate discharge characteristics ensure reliable performance in UPS and Telecom applications.
- **Maintenance-Free, Non-Spillable** - Proven VRLA technology guarantees safe operation without maintenance and 'non-restricted article' status for transportation.
- **Low Self-Discharge** - Lead-calcium alloy grids and use of high purity lead account for superior shelf-life characteristics permitting storage for extended periods of time.
- **Designed-In Reliability** - Cutting-edge manufacturing and process control combined with meticulous quality assurance procedures guarantee consistent and dependable performance


### PERFORMANCE SPECIFICATIONS

<b>Nominal Voltage</b>	6V(3 cells)	
<b>Design Floating Life @25°C</b>	12 Years	
<b>Nominal Capacity @25°C</b>	20 hour rate	7.0Ah
	10 hour rate	6.58Ah
	5 hour rate	6.265Ah
	3 hour rate	5.67Ah
	1 hour rate	4.465Ah
<b>Internal Resistance</b>	Full Charged Battery@25°C	<12mΩ
<b>Energy Density (20-hr. rate)</b>	81.81W-h/l	
<b>Specific Energy (20-hr. rate)</b>	40.00W-h/kg	
<b>Shelf Life (nominal capacity at 20°C)</b>	1 Month	97%
	3 Months	91%
	6 Months	83%
<b>Standby Use Charge (Constant Voltage) @25°C</b>	Initial Charging Current Less than 2.1A Voltage 6.85 - 6.95V	
	<b>Cycle Use Charge (Constant Voltage) @25°C</b>	
<b>Operating Temperature Range</b>	Initial Charging Current Less than 2.1A Voltage 7.30 - 7.40V	
	Charge	0°C to 50°C
	Discharge	-20°C to 60°C



### GENERAL FEATURES

mm

Unit: mm




Length	151±1
Width	34±1
Height	94±1
Total Height	100±1
Weight(kg)	1.05±3%









### TERMINALS

mm

F2 Terminal

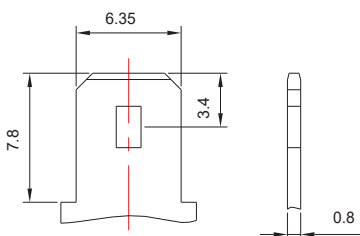

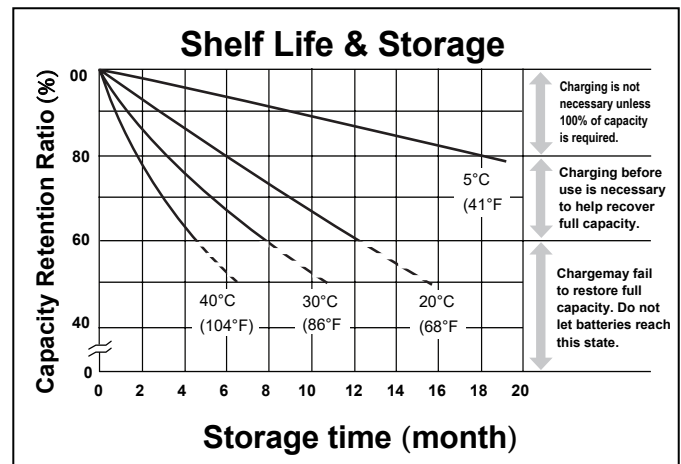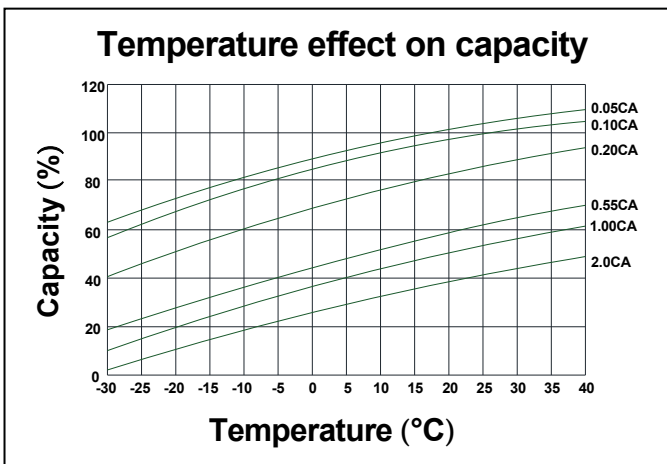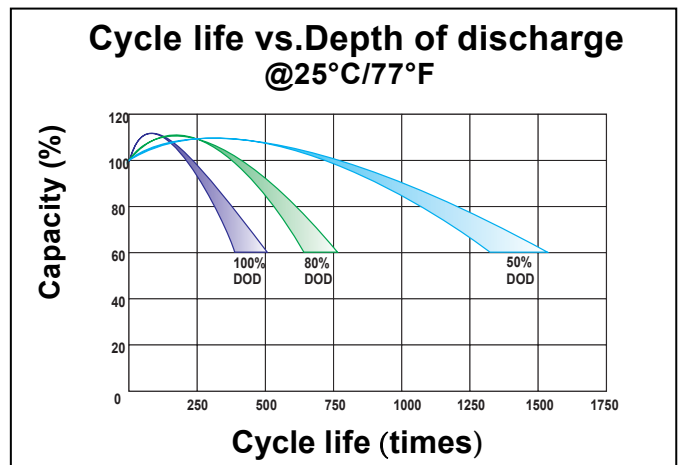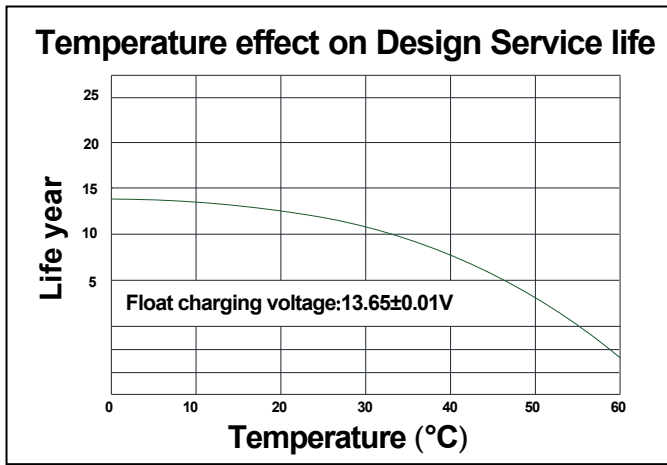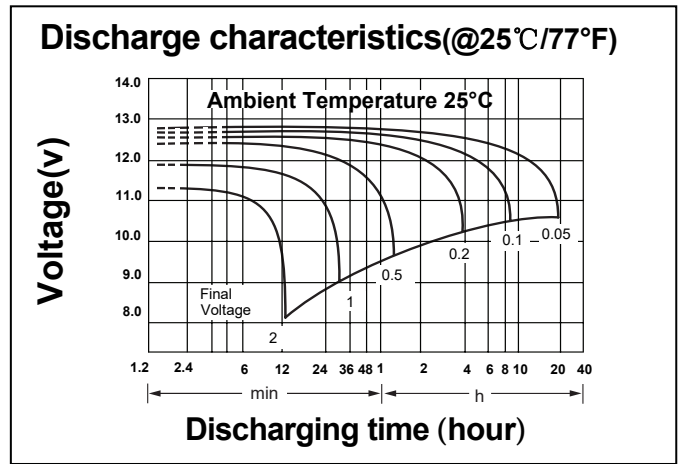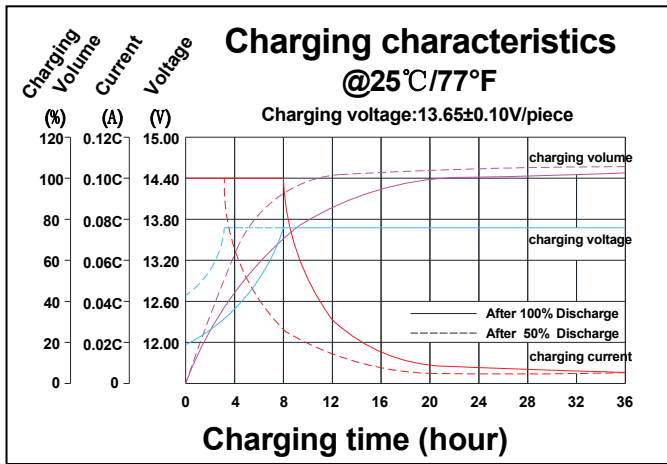

**CONSTANT CURRENT DISCHARGE RATINGS (Amperes at 25°C)**

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	27.75	18.10	13.35	7.728	4.465	2.634	1.915	1.525	1.287	0.860	0.701	0.364
1.65V	26.75	17.56	13.00	7.558	4.382	2.596	1.890	1.506	1.273	0.852	0.694	0.362
1.70V	25.45	16.85	12.54	7.334	4.273	2.545	1.856	1.481	1.253	0.840	0.685	0.358
1.75V	23.77	15.94	11.94	7.040	4.129	2.477	1.811	1.447	1.226	0.825	0.673	0.352
1.80V	21.66	14.77	11.17	6.659	3.941	2.388	1.752	1.403	1.192	0.804	0.658	0.346